



HTD 14M 皮帶規格(齒距：14.0mm)

皮帶齒型尺寸





齒輪齒型尺寸

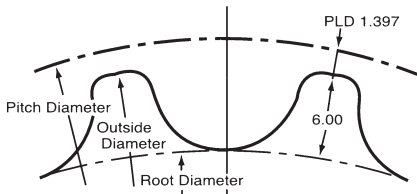

皮帶表示方法：1778 14M 35
 長度mm 規格 寬mm

HTD 20M 皮帶規格(齒距：20mm)

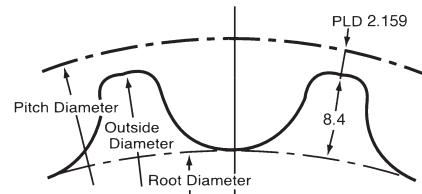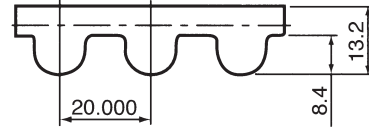

皮帶表示方法：5200 20M 115
 長度mm 皮帶規格 寬mm

HTD 14M 皮帶長度

| 規格 | 長度(mm) | 齒數 |
|-----------|--------|-----|
| *784-14M | 784 | 56 |
| *826-14M | 826 | 59 |
| *924-14M | 924 | 66 |
| 938-14M | 938 | 67 |
| 966-14M | 966 | 69 |
| 1036-14M | 1036 | 74 |
| 1050-14M | 1050 | 75 |
| 1078-14M | 1078 | 77 |
| *1092-14M | 1092 | 78 |
| 1120-14M | 1120 | 80 |
| 1148-14M | 1148 | 82 |
| 1190-14M | 1190 | 85 |
| 1246-14M | 1246 | 89 |
| 1260-14M | 1260 | 90 |
| 1330-14M | 1330 | 95 |
| 1344-14M | 1344 | 96 |
| 1358-14M | 1358 | 97 |
| 1400-14M | 1400 | 100 |
| 1456-14M | 1456 | 104 |
| 1512-14M | 1512 | 108 |
| 1540-14M | 1540 | 110 |
| 1568-14M | 1568 | 112 |
| 1610-14M | 1610 | 115 |
| 1638-14M | 1638 | 117 |
| 1652-14M | 1652 | 118 |
| 1680-14M | 1680 | 120 |
| 1736-14M | 1736 | 124 |
| 1778-14M | 1778 | 127 |
| 1806-14M | 1806 | 129 |
| 1820-14M | 1820 | 130 |
| 1890-14M | 1890 | 135 |
| 1932-14M | 1932 | 138 |
| 1946-14M | 1946 | 139 |
| 1988-14M | 1988 | 142 |
| 2002-14M | 2002 | 143 |
| 2044-14M | 2044 | 146 |
| 2100-14M | 2100 | 150 |
| 2198-14M | 2198 | 157 |
| 2240-14M | 2240 | 160 |
| 2310-14M | 2310 | 165 |
| 2450-14M | 2450 | 175 |
| 2590-14M | 2590 | 185 |
| 2604-14M | 2604 | 186 |
| 2660-14M | 2660 | 190 |
| 2800-14M | 2800 | 200 |

HTD 20M 皮帶長度

| 規格 | 長度(mm) | 齒數 |
|-----------|--------|-----|
| 2940-14M | 2940 | 210 |
| 3010-14M | 3010 | 215 |
| 3136-14M | 3136 | 224 |
| 3150-14M | 3150 | 225 |
| 3360-14M | 3360 | 240 |
| 3500-14M | 3500 | 250 |
| 3850-14M | 3850 | 275 |
| 4004-14M | 4004 | 286 |
| 4326-14M | 4326 | 309 |
| *4578-14M | 4578 | 327 |
| *4956-14M | 4956 | 354 |
| 5320-14M | 5320 | 380 |
| *5740-14M | 5740 | 410 |
| *6160-14M | 6160 | 440 |
| *6860-14M | 6860 | 490 |

| 規格 | 長度(mm) | 齒數 |
|-----------|--------|-----|
| *2000-20M | 2000 | 100 |
| *2500-20M | 2500 | 125 |
| *3400-20M | 3400 | 170 |
| *3800-20M | 3800 | 190 |
| *4200-20M | 4200 | 210 |
| *4600-20M | 4600 | 230 |
| *5000-20M | 5000 | 250 |
| *5200-20M | 5200 | 260 |
| *5400-20M | 5400 | 270 |
| *5600-20M | 5600 | 280 |
| *5800-20M | 5800 | 290 |
| *6000-20M | 6000 | 300 |
| *6200-20M | 6200 | 310 |
| *6400-20M | 6400 | 320 |
| *6600-20M | 6600 | 330 |

Available widths of 115mm, 170mm, 230mm, 290mm and 340mm.

HTD 14M標準皮帶寬

| 皮帶寬(mm) | 30.0 | 40.0 | 55.0 | 70.0 | 85.0 | 100.0 | 115.0 | 130.0 | 150.0 | 170.0 |
|---------|------|------|------|------|------|-------|-------|-------|-------|-------|
| 皮帶寬代號 | 30 | 40 | 55 | 70 | 85 | 100 | 115 | 130 | 150 | 170 |

$$\text{齒輪節圓直徑 (PD)} = \frac{P \times N}{\pi}$$

$$\text{齒輪外徑 (OD)} = PD - 2 \times PLD$$

P : 皮帶齒距(mm) $\pi = 3.14159$

N : 皮帶齒輪齒數 14M · PLD : 1.397mm